


A-A

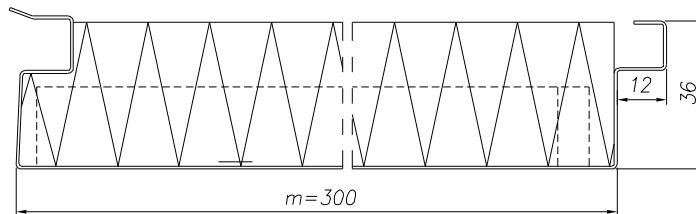

- Dimension:** mxL - module of panels x length, is stated by orderer (Lmax=3000 mm)
- Material and finishing:**
- galv. steel sheet of core thick. 0,7 mm covered with PVC foil or painted, protected of protection foil
 - Mineral wool of density 40 kg/m³, thick. 35 mm,
 - glue.

Example of marking: Ceiling panel B15 of module m=300 mm and length L=2400 mm, covered of PCV foil in colour Dobel 1306

CEILING PANEL B15 300x2400/D.1306

N24-04/31-C4/01

- Remarks:**
1. It is permitted to order the panels with other module „m” (i.e. m=200).
 2. It is also permitted to use stainless steel sheet of core thick. 0,6 mm.
 3. Ceiling of fireproofness B15 is received by placing additional insulation of mineral wool with density 100kg/m³, thick. 25mm.

Mass: **2,98 kg/r.m.**
(with additional insulation)



LUBMOR Ltd.

Wieleńska 1 Str, 64-980 Trzcianka

phone (067) 216-22-44

fax (067) 216-59-40

e-mail: lubmor@lubmor.pl

www.lubmor.pl

CEILING PANEL B15

N24-04
31-C4/01